

INSTALLATION OF THE GLAZING

Here you can see the list of the individual glass panes (according to your choice 4 mm transparent tempered glass, 4 mm hammered glass or 8 mm panels). **On the roof, you must position two S-hooks (44) between pane C and pane B, 5 cm from the outer edges.**



If you have replaced the tempered glass glazing with polycarbonate panels, the installation method remains the same. Please note that for the installation of the roof glazing you need to install the fastener (11) at the bottom end of the panels (see picture bellow).

The open spaces provided by the roof windows allow you to access the profiles at the ridge to install the roof glazing and sealing.

S-hook (44)



Obturator (11)

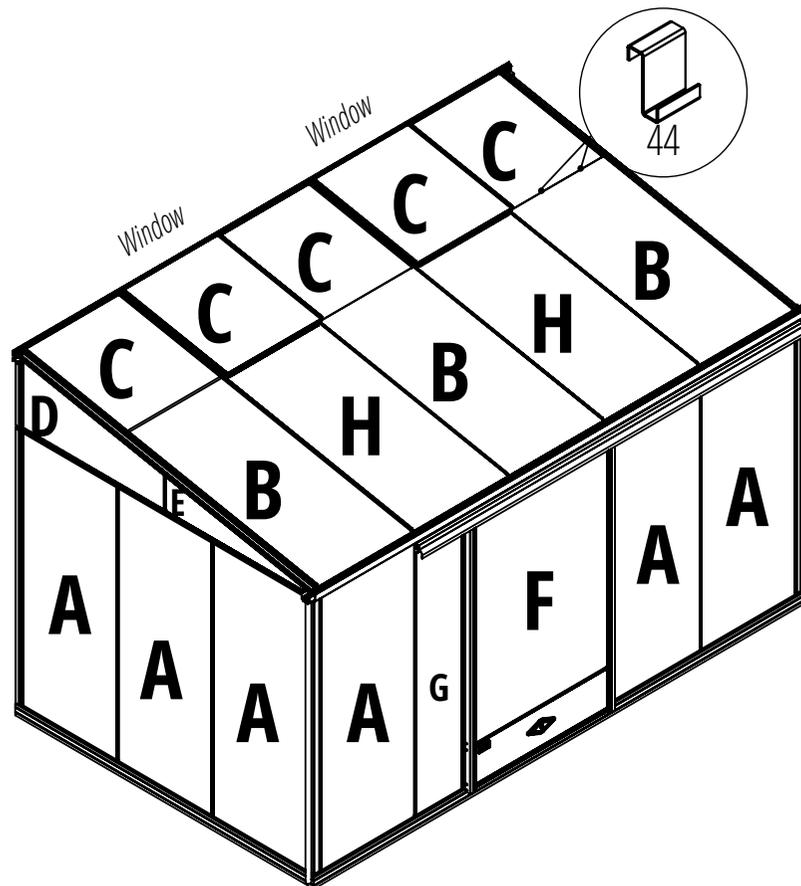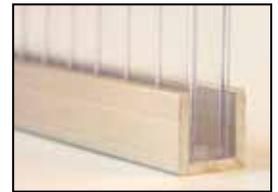

Marker	Size in mm	Marker	Size in mm
A	Gutter height 1.80 m 1650 x 730 mm	F	Gutter height 1.80 m 1250 x 1028 mm
A	Gutter height 2.00 m 1850 x 730 mm	F	Gutter height 2.00 m 1450 x 1028 mm
B	1523 x 730 mm	G	Gutter height 1.80 m 361 x 1650 mm
C	825 x 730 mm	G	Gutter height 2.00 m 361 x 1850 mm
D	1100 x 231 x 447 mm	H	Under window glass 1507 x 730 mm
E	1115 x 231 x 14 mm	B + C	If polycarbonate roofing 2328 x 730 mm

If you have one or more **wall windows** the glass size is 825 x 730 mm, while the under-window glass size is 1010 x 730 mm.
For an gutter height of 1.80 m, the size of the under-window glass is 810 x 730 mm.

To fit the glass, use the suction cup provided. Make sure the suction cup grips the glass properly.